

GET SERIES

HIGH EFFICIENCY X13 CASED CEILING MOUNT ELECTRIC HEAT DX COOL AIR HANDLER

Product Dimensions & Specifications



WARRANTY

One year limited parts warranty

OPTIONS

See options menu

ASSEMBLED IN THE USA

STANDARD FEATURES

APPLICATION VERSATILITY

Built in mounting tabs for ceiling or furrdown mounting. Louvered ceiling access panel has separate frame that attaches to ceiling joists. Solid access panel available for use with end return installations. Compatible with most brands of air conditioners or heat pumps.

MOTOR

X13 speeds and torques are controlled by software embedded in the motor to maintain constant torque. Motors are pre-programmed at the factory.

CABINET

Sturdy, fully insulated galvanized steel cabinet and knockout for duct return.

ELECTRONIC CIRCUIT BOARD

Electronic circuit board provides 30 secs ON/OFF blower time delay extracting more heat/cool from the coil.

DX COIL

High efficiency rifled copper tube/enhanced aluminum fins provide maximum heat transfer. All coils immersion tested at 500 psi then nitrogen pressurized and factory sealed for maximum reliability. Liquid-line Schrader allows pre-installation pressure testing. Available with either orifice or TXV metering device. Field-installable bolt-on TXVs is also available. Primary & secondary condensate drain. All drain connections are 3/4" MPT. Powder-painted metal drain pan. Access door allows for coil cleaning. Certified for use with either R22 or R410A.

Representative image only.

Some models may vary in appearance.

Due to continuous product improvement, specifications are subject to change without notice.



Rev. Date: 05/13/15

© 2015 AirMark

AIRMARK

BLOWER DATA

UNIT MODEL	SPEED TAP	AMP	VOLT	HP	CFM VS. STATIC PRESSURE				
					0.00	0.10	0.20	0.30	0.40
GET 18-24	HI	4.0	240	1/2	900	800	750	700	610
	MED				700	620	580	540	510
	LO				600	510	480	440	410
GET 30-36	HI				1300	1200	1100	1050	950
	MED				1150	1100	1000	970	880
	LO				1050	1000	930	880	830

Units should not be applied to a system with less than 350 CFM/Ton airflow.
Add .05 static when enclosure and/or ceiling panel are used.




AIR HANDLER CHASSIS NOMENCLATURE

G	E	T	18	G	-001
AirMark Air Handler	<u>Voltage & Motor</u> E = 240V X13 Motor	<u>Configuration</u> T = Cased Ceiling Mount	Nominal Tonnage (MBTUH)	<u>Metering Device</u> 4 = non-bleed A/C or H/P R410 TXV 6 = 20% bleed A/C or H/P R410 TXV B = 20% bleed A/C or H/P R22 TXV F = R-22 Flo-rater G = R-410A Flo-rater X = non-bleed A/C or H/P R22 TXV	Option Code

ELECTRIC HEAT KIT NOMENCLATURE

H	C	S	10
H = Fits GAS, GAT, GES, GET*		S = Small Cabinet (18 - 24) L = LArge Cabinet (30 - 36)	<u>Heat Strip</u> 00 = NO Heat 03 = 3 KW 05 = 5 KW 06 = 6 KW 08 = 8 KW 10 = 10 KW

PHYSICAL DIMENSIONS				
UNIT MODEL	A"	B"	C"	D"
GET 18-24	40	34-5/8	30	37-1/4
GET 30-36	48	56-1/4	42	49-1/4

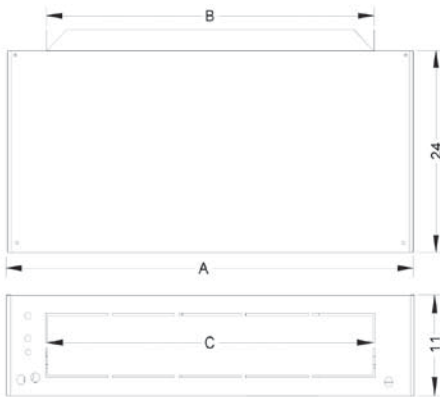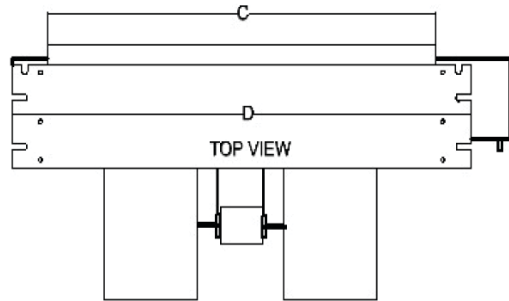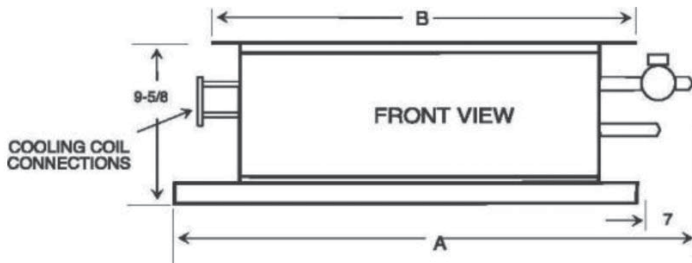

ENCLOSURE DIMENSIONS			
UNIT MODEL	A"	B"	C"
GET 18-24	39-3/4	30-5/8	29
GET 30-36	51-3/4	42-5/8	41



KNOCKOUT FOR DUCTED RETURN
 (Ducted return requires remote filter grille (field supplied) and non-louvered panel)

Access Door

VERSATILITY

Equipped with hidden frame feature. Fastens to the outside wall surface and does not have to perfectly match the hole opening. Frame screws are not visible after installation. Available in either solid (S) or louvered (L) style.

MATERIALS

Galvanized steel construction with powder paint finish. Can be latex painted in the field.



FILTER

20" x 20" field supplied.

WARRANTY

One-year limited parts warranty.

ACCESS DOOR DIMENSIONS AND SPECIFICATIONS					
PANEL MODEL	FOR USE WITH	GAS ACCESS DOOR AND FRAME			
		A"	B"	C"	D"
GAD-3(S/L)	GET 18/24	43-5/8	27-1/2	42-1/8	26
GAD-4(S/L)	GET 30/36	55-1/4	27-1/2	53-3/4	26

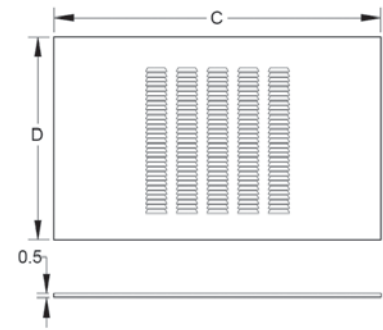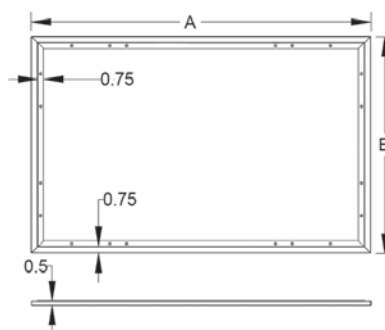

373 Atascocita Rd
 Humble, TX 77396
 Phone 800.423.9007
 Fax 281.441.6510
www.airmark-ac.com